

Bids for 30T Tilt Deck Trailer


	Twamco	Tesco/Williamson
30T Tilt Deck Trailer	\$ 41,121.00	\$ 32,612.00

Twamco TRAILER

1920 West 3500 South
Salt Lake City, UT 84119

Phone (801) 972-8325
Email: twamco@burgoyne.com

Fax (801) 973-0224
Web Site: www.twamco.com

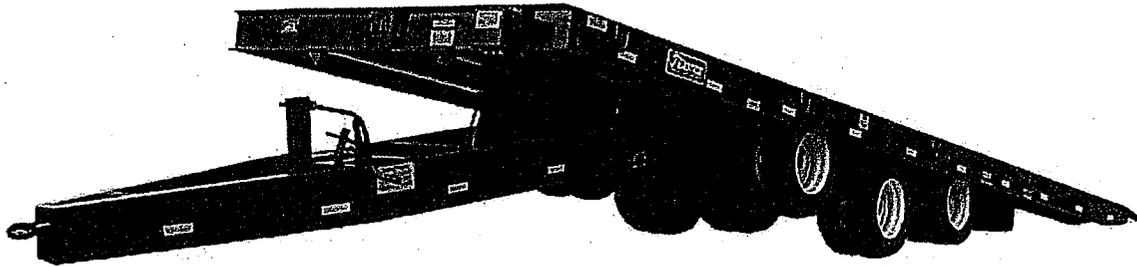

30-TON PULL TYPE TILT DECK TRAILER

Year: 2011

Model: Pull Type Tilt Deck (PTTDM3)

Capacity: 30-ton payload (60,000 lbs.), trailer carries a minimum of 2-1 static safety load factor with 15% load transfer.

Overall Trailer Length: 42'

Full Length Tilt Deck: 35'

Tilt Angle: 10 degrees max.

Deck Width: 9'

Deck Height: 35" unloaded

Tongue Length: 7' front of deck to center of hitch, 'A' frame cold formed from 14" 26# WF beam

Hinge Points: Greased single pin type

Hitch Type: Premier #300 36,000 lb. vertical, 100,000 lb. gross pull 1 5/8 x 3" pintle eye with 2 ea 1/2" adjustable safety chains with latched 4-1/2 ton hooks

Hitch Height: Adjustable from 21" in 3 ea 4-1/2" increments

Suspension Type: Twamco 90,000 lb greased walker beam bolted to the main frame.

Front Lift Axle: 1 ea non steerable 25,000 lb with air regulator

Primary Axles: 2 ea 22,500 lb 71-1/2" track 10 stud, oil bath hubs, 5" round through type axle beams

Wheels: 12 ea steel dual 6.75" x 17.5" Accuride 28112; 10 on 8-3/4 bolt hole, disc type, tubeless

Tires: 12 ea. 235/75R 17.5 tubeless low profile radials with extended valve stems

Spare Tire: 1 ea mounted on the tongue

Area Over Tires: Covered with reinforced ¼" cleated high tensile plate. ½" round bar 36" cleats positioned on approx 15" centers.

Brakes: 12 1/4" x 7-1/2" s-cam actuated full air spring brakes with auto slacks with outer bleed off valve.

Emergency Break Away Protection: Standard emergency air relay valve meets all Federal laws.

Lights: Fully lighted to meet all Federal ICC regulations, Truck Lite brand L.E.D lights with reflective tape

Light Plug Coupler (Trailer to Truck): 7 pole male

Wiring: Color coded and enclosed in conduit for protection.

Hinged Lit License Plate Brkt: 1 ea

Deck Cushioning Cylinders: 2 ea 12" x 14-1/4" 12,000 lb air over hydraulic lift/cushion cylinder. Operates on min. 110 psi air pressure from the emergency side of towing vehicle. Trailer parking brakes operate on independent air system.

Locking Tool Box: 1 ea located in the A frame portion of the tongue.

Paint: Trailer is sandblasted and then completely primed and painted white in all areas. Includes reflective striping.

Decking: 2" raised rough cut oak secured to every cross member with 2 ea ¼" torx screws and welded down on each end with angle iron.

Tie Down Rings: 1" forged steel type on 3' centers per side

Mud Flaps: 2 ea. Rubber

Frame: High tensile frame with 5/16 formed rear box cross member reinforced with ½" T-1. 10" 26# WF inner rails, 10" 15.3# outer channel rails,

Rear Bumper: Full width stainless steel cable actuated flip ramp. Serves as under ride protective device.

Front Bumper: full width 4" channel

Parking Jack: 1 ea 12,000 lb spring loaded quick drop with min 11" ground clearance

Deck Lock: 40,000 lb spring loaded auto lock located at the center front

Loaded Towing Speed: 65 M.P.H. under normal highway conditions

Delivery: Approx. 90 days (Based on present schedule)

Terms: Cost Per Unit: \$41,121.00 FOB Salt Lake City, UT

TESCO/WILLIAMSEN

1925 WEST INDIANA AVE, SALT LAKE CITY, UTAH 84104
PHONE 801-973-9400 TOLL FREE 800-828-9847 FAX 801-973-2838

July 11, 2011

Wayne Anderton
Tooele County Road Dept.
Tooele, Utah
435-830-8444 Cell
435-833-9675 Fax

D-DATE
QUOTE#BJ1107

Dear Wayne

Tesco Williamsen is pleased to quote to you the following.

SPECIAL

1 each	Tilt deck trailer as per spec 44' long and 34' tilt deck. Williamsen model # WT42TD30 with tires and wheels.	\$32,612.00
--------	---	-------------

THANK YOU,

BRUCE JOHANSEN

CUSTOMER ACCEPTANCE