



Quote #: 5467

April 18, 2012

Dear Mr. Warner:

Toter Incorporated is pleased to provide Tooele County the following pricing off Toter's contract through the National IPA agreement bid by the City of Tucson.

PREPARED FOR:	SHIP TO:
Mr. Robert Warner Tooele County 2830 South Bauer Road Tooele, UT 84074 E: rwarnar@co.tooele.ut.us	Same

DESCRIPTION	QUANTITY	UNIT PRICE
Toter 96 Gallon – Model 79296 – EVR II Universal/Nestable Container ❖ Color – 940 Green body and lid ❖ Serial Numbers – Custom serial numbers hot stamped on front of body ❖ Body Hot Stamp – Custom body stamp on both sides of body (<u>New</u>) ❖ Lid Hot Stamp – Standard service designation stamped on lid ❖ Wheels – Standard 10" Sunburst wheel ❖ Warranty – Container body, lid, wheels, axle, stop bar and all attachments are covered by a 10-year unprorated warranty (special exclusions may apply to non-standard options) ❖ Cart Assembly – <u>Shipped with lids attached; stop bar & axle pre-installed</u>	624 (1 TL)	\$44.00
New Custom Body Stamp Set-Up Fee (one time per new custom stamp required) ❖ Customer to provide artwork	1	\$300.00

ADDITIONAL INFORMATION:
<p>Freight: FOB factory estimated freight is \$2,392.00 per truckload. This is an estimate only and may change based on actual freight charges at time of order shipment.</p> <p>Please Note: Pricing on this contract is evaluated every six (6) months for price adjustments based on current market conditions. The current pricing is effective December 17, 2011 – June 16, 2012.</p> <p>Payment Terms: Net 30 days after shipping pending credit approval.</p> <p>Delivery: Shipment within 4-6 weeks (business days) ARO; pending artwork approval for new custom body stamp.</p> <p>Above pricing is based on orders placed in the quantities stated above. Should quantity requirements change, please contact Toter for a revised quotation.</p>

Toter prices do not include state and local taxes, if applicable. Delivery is subject to availability at time of order entry. Pricing is based on orders placed in the quantities stated above. This quote supersedes any past proposal on the same item.

If you should have questions regarding Toter's products, services, or this proposal, please contact me at (800) 424-0422.

Sincerely,

Joe Albrecht – via e-mail

Manager, Pacific Southwest Region

c: Rob Vezina, Judy Bates

ACCEPTED BY:

Tooele County

Date

P. O. #

Please return signed quotes to fax 559-320-0366. Call 559-320-0364 for further information.

EVR[®] II FEATURES

Available in 21, 32, 48, 64, and 96 gallon sizes with universal design for compatibility with both fully and semi-automated lifters

Nestable design allows fully assembled 96, 64, and 48 gallon carts to be stacked one inside another for storage and delivery efficiencies and cost savings

Textured surface resists scratches and hides unsightly dirt

Patented Rugged Rim[®] adds rigidity and extra material in critical wear areas for extended cart life

Large hot stamp area

Standard cart serial number

Molded-in axle journals provide up to 6 times more support than drilled holes

Large footprint and aerodynamic design create industry-leading wind and "set-down" stability

Cart does not fall over when lid is flipped back

Low, narrow profile design is easy to maneuver and fits through gates and doors

Multilingual user instructions are standard

Optional lid hot stamp and raised wording

Large, four color in mold label (IML) is optional

Optional bar code cart identification

Optional UHF RFID tag mounted inside handle

LF RFID option

Factory installed 360° rotating steel stop bar is set in a molded-in, sealed journal




5/8" axle has over 2,000 lbs. of bending strength




Bottom wear strip provides outstanding abrasion protection

CARTS MEET ANSI STANDARDS Z245.30 FOR SAFETY AND Z245.60 FOR LIFTER COMPATIBILITY.*

* 21 gallon is below Type B saddle height.

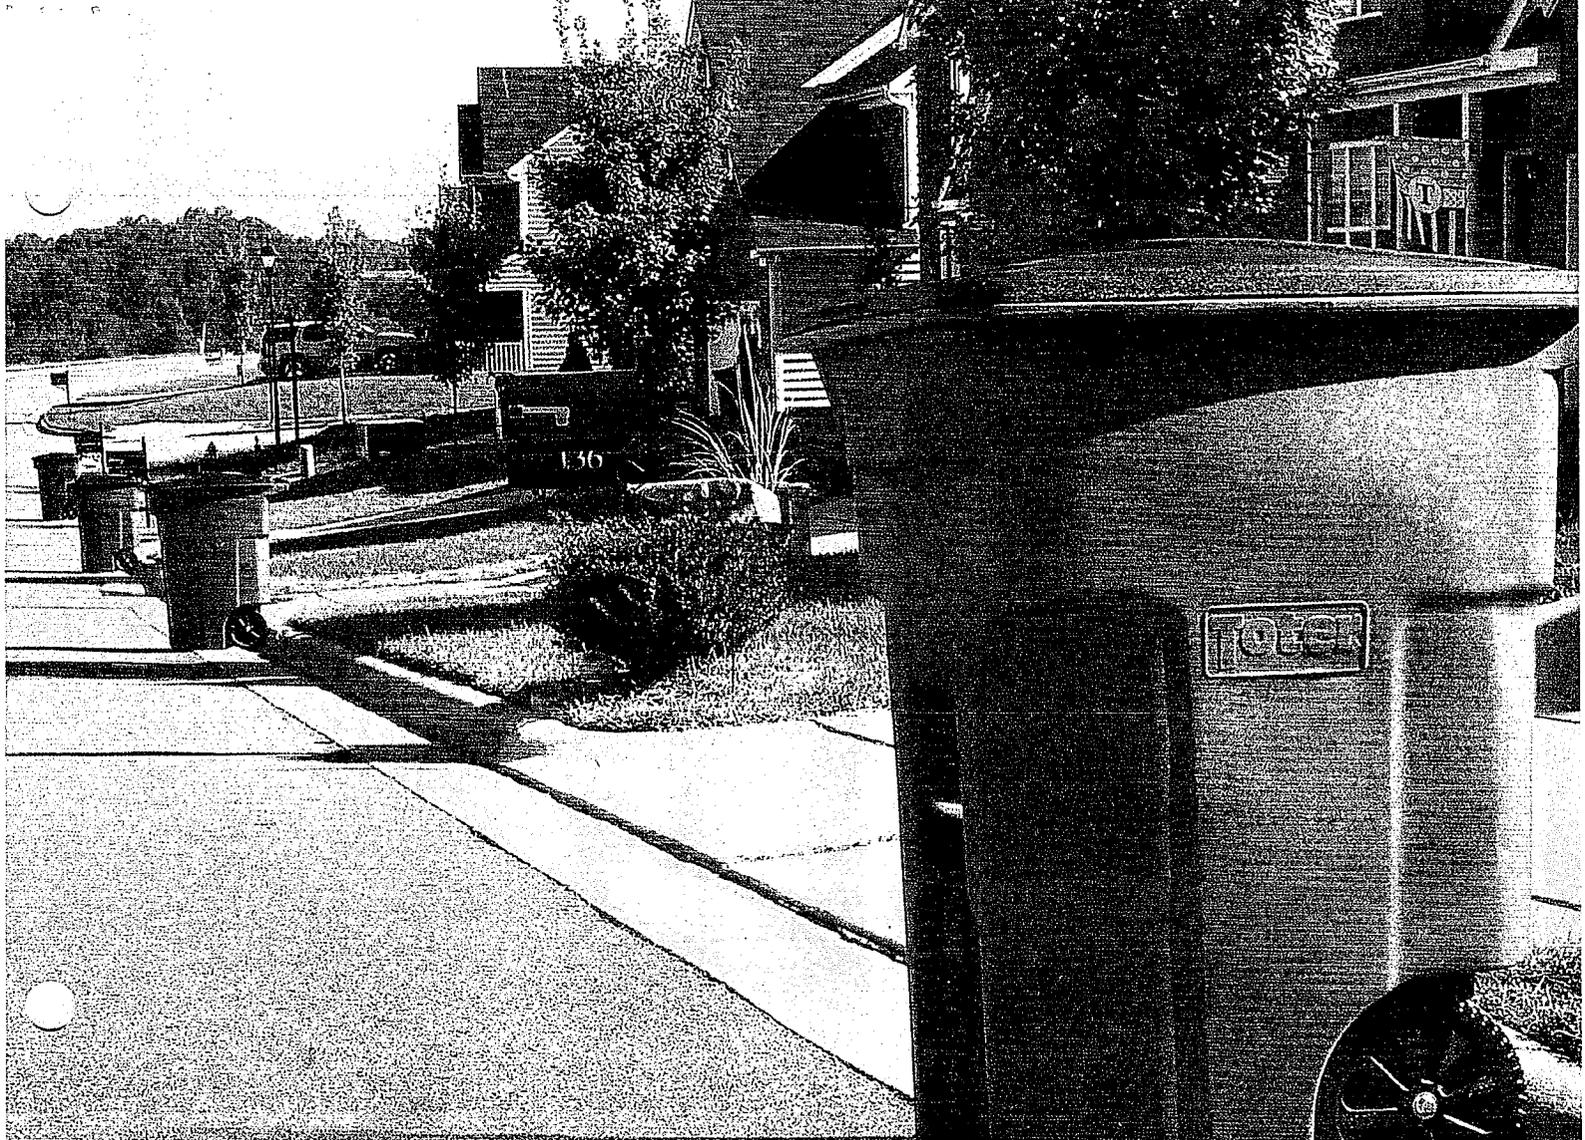

Toter[®]

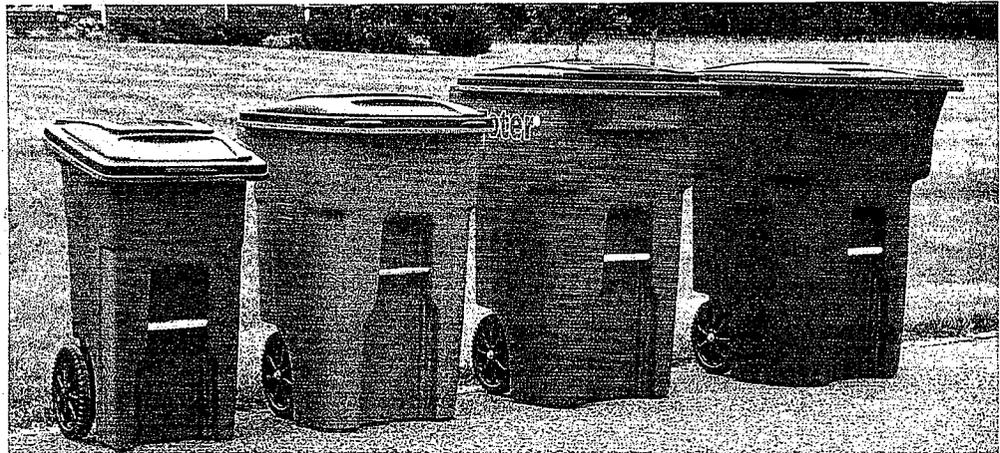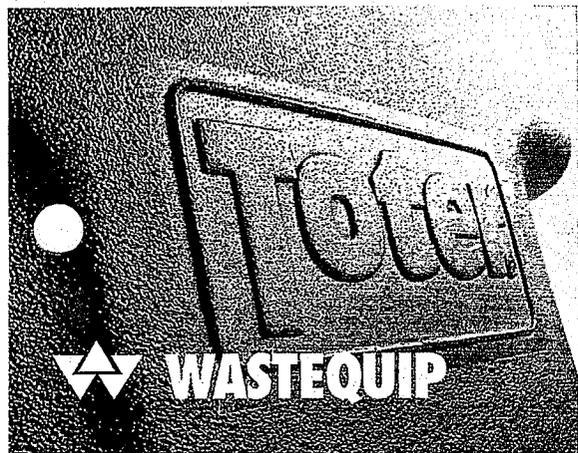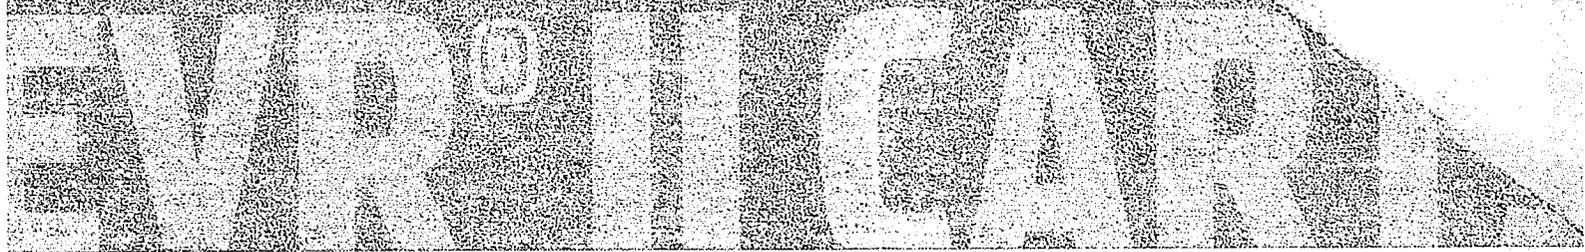



Facilities Located:
 1000 Raco Court, Lawrenceville, GA 30046
 625 West Mockingbird Lane, Dallas, TX 75247
 1738 W. 20th St, Erie, PA 16502
 7452 Presidents Dr, Orlando, FL 32809
 8875 Commerce Dr, DeSoto, KS 66018
 7800 100th St, Pleasant Prairie, WI 53158
 4010 East 26th St, Los Angeles, CA 90058

Proposal

Proposal #:

April 19, 2012

PREPARED FOR:	SHIP TO:
Tooele County Robert Warner Tooele, UT 84074 435-843-4781 Fax:	TBD

ITEM DESCRIPTION	QUANTITY	UNIT PRICE	EXTENDED PRICE
95 Gallon Waste Cart	300	\$48.85	\$ 14,655.00
Cart Body: Black Lid: Black			
Brand Plate - One Time Set Up Fee	1	\$350.00	\$ 350.00
Subtotal =			\$ 15,005.00
Truckload Freight Rate =	1	\$1,970.00	\$ 1,970.00
Total =			\$ 16,975.00

ADDITIONAL INFORMATION:

Order Details: Serial # TBD. Lid and Body Brand TBD

Freight Info: Common Carrier TBD

Wheel Type: 10" Snap on with Intergrated Spacer

Leadtime: 2 Weeks After Receipt of Order

Terms: Net 30

Warranty: 10 year unprorated warranty on cart body, lid, wheels, axle, stop bar and all attachments.

Quote Valid: 30 Days

Taxes: All applicable taxes shall be paid by the Buyer unless a proper exemption is provided and validated.

PRESENTED BY:	ACCEPTED BY:
 <div style="text-align: right;">4/19/2012</div> Antony Homenock Date	 Sign and Print Name Date Title: _____

To initiate order, please call or send signed proposal via fax or email to Presented By representative.

Environmental

**Rehrig Pacific
Company**
Since 1973

Rehrig Pacific Roll-out Carts

Proven to withstand the rigors of today's collection systems, Rehrig Pacific's **HuskyLite Roll-out Carts** are setting new industry standards for durability and efficiency. Available in 18 gallon through 95 gallon models, for nearly any curbside application, these carts roll easily even with heavy loads. The continuous one-piece handle provides a strong gripping area and the wide wheelbase makes maneuvering easy.

HuskyLite carts are flexible, yet hold their shape even after years of service. A reinforced top lip adds strength and rigidity as do the double drag rail and reinforced bottom. The specially designed wide ground-hugging base helps keep these carts upright and stable.

Options for the Roll-out Carts include internal and external locking lids, which can be made with slots for collecting confidential documents or cutouts for recyclable beverage containers. Wheel options include blow-molded wheels or quiet treaded snap-on wheels that install in seconds.


Roll-out Carts are shipped with lids already attached, saving additional assembly time.



ROC-65NB

ROC-35MB

ROC-18/20

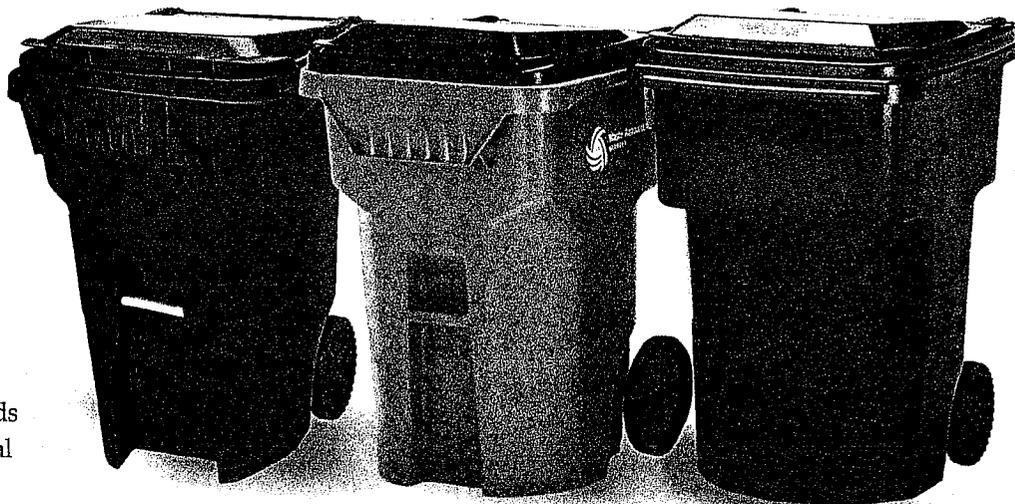

ROC-95NB

ROC-95U

ROC-95FA





Rehrig Pacific Roll-out Carts

Product Information

Dimensions ¹ (in.)	ROC-18/20	ROC-35 ³	ROC-65	ROC-95
Height w/Lid	32.60	39.13	40.58	45.13
Width	19.80	20.20	26.70	28.50
Depth	18.00	22.98	28.11	33.73
ANSI Load Rating ² (lb.)	70.00	122.50	227.50	332.50

Truckload Quantities:	ROC-18	ROC-20	ROC-35	ROC-65	ROC-95
Stack Size	7 high	Inquire	9 high	9 high	8/9 high
48' Trailer	770	Inquire	864	504	384/432
53' Trailer	875	Inquire	1,080	648	432/486

¹ Dimensions vary depending on wheel and lid options


² ANSI Z245.30 - 2008

³ 20 gallon insert available


Roll-Out Carts

Features and Options


- For Semi-Automated or Automated Collection of Household Refuse, Recyclables and Organic Wastes
- Universal Cart Models Available in All Sizes; Fully-Automated ROC-95FA Cart also Available
- Constructed of High Quality, Resilient UV-Stabilized HDPE Resin. Available in a Wide Range of Colors.
- Rotating Metal or Molded-In Catch Bars
- Hot-Stamp Branding of Logos and Recycling Slogans; Bar Coding, Sequential Numbering and Multi-Color In-Mold Labeling Options
- RFID Integration Available for Use in Asset and Participation Tracking Programs
- Divider Option for Two-Stream Collection
- Optional European Lip
- Lid Cutouts for Recyclables Available
- Lid Opening Options Include 90° or 110° Stops
- Blow Molded or Quiet Tread Wheels Available in Cotter Pin, End Cap or Snap-on Styles
- Optional Features for Confidential Document Destruction Carts:
 - Lids with Internal Key Lock or External Tongue Plate and Padlock
 - Slotted Openings with Anti-Fish Option
- See Organic Waste Container Specification Sheet for Additional Features and Options




ROC-18 Carts Stacked




European Lip



Branded ID Number and Bar Code




Gravity Lock



Internal Lock with Key




External Lock (padlock not included)



Multi-Color In-Mold Label (I.M.L.)



Optional Openings for Recyclables



Optional 90° or 110° Lid Stops

A FAMILY TRADITION OF GROWTH, SERVICE AND INNOVATION

Headquarters: 4010 East 26th Street Los Angeles, California 90058 (323) 262-5145 (800) 421-6244 FAX: (323) 269-8506
 Erie, PA (800) 458-0403 • Atlanta, GA (800) 241-9693 • Dallas, TX (800) 426-9189 • Kenosha, WI (800) 934-3312
 De Soto, KS (866) 265-4108 • Orlando, FL (800) 998-2525 • Canada (877) 456-8094 • Mexico +52 (442) 296-2000
www.rehrigpacific.com • info@rehrigpacific.com



1755 North 2000 West • Brigham City, Utah 84302 • (435) 734-9920 • Fax (435) 734-271

April 18, 2012

Tooele County Solid Waste
47 S. Main
Tooele, UT 84074

To whom it may concern,

RE: Quote/Garbage Container


We are pleased to provide the following estimate on Containers

Black XLPE 100 gallon Containers, \$81.00

We appreciate the opportunity to submit this bid and if you have any questions or concerns, please do not hesitate to contact us.

Thanks,

Michelle Hirschi
Rotational Molding of Utah



Rotational Molding OF UTAH

1755 N. 2000 W.
Brigham City, UT 84302

(435) 734-9920
Fax: (435) 734-2717
sales@synergyplastics.net

The leader in custom rotational and compression molding.

Trash and Recycling Containers 60 and 100 gallon Curbside Containers

[Home](#)

[Products](#)

[Plastic Pallets](#)

[Trash Containers](#)

[Water Tanks](#)

[The Jack Block](#) [Buy Online!](#)

[Stepping Stones](#) [Buy Online!](#)

[Trash Container Wheels](#)

[Custom Rotational Molding](#)

[Custom Compression Molding](#)

[About Us](#)

[Contact Us](#)



60 Gallon Automated Container

- Weight 34 lbs.
- Size: 39" High, 31" Wide, and 35" Deep

100 Gallon Automated Container

- Weight 44 lbs.
- Size: 47" High, 31" Wide, and 35" Deep

Both sizes include:

- 100% Solid Recycled Plastic Wheels
- Steel Hinge and Axle for extra strength
- Molded in name plate and marked with serial number
 - Lid opening of 270°
- Engineered balance for easy handling
- Delivered 95% Assembled (less than 1 minute of assembly)
 - Custom colors available
- Semi-automated container also available

[Download full 60 and 100 gallon container specifications \(PDF\)](#)

Please contact us for a quote today!

TRASHHAUL


Linear Polyethylene Containers
Also Available

Custom Colors Available

Semi-Automated Styles
Also Available

60 Gallon Automated

Engineered balance for easy handling



Specifications:

- Rotational Molding Process
- 100% Cross-Linked Polyethylene
- Axel : 5/8" Solid Steel
- Branded date/Serial # if required
- 4 Pal Nuts – Zinc
- Hinge : 5/8" Steel Tube
- 100% Recycled Wheels

Design Specifications:


A. Resin Weight: 28 lbs. minimum without hardware
Overall weight approx. 32 lbs.

B. Dimensions:

1. Height: 39" Maximum with lid, fully assembled
2. Width 31" maximum at the widest point, including hardware
3. Hip on gripping surface diameter: 24" to 26"

100 Gallon Automated

Engineered balance for easy handling

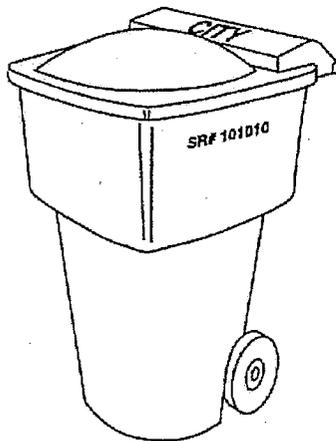

Specifications:

- Rotational Molding Process
- 100% Cross-Linked Polyethylene
- Axel : 5/8" Solid Steel
- Branded date/Serial # if required
- 4 Pal Nuts – Zinc
- Hinge : 5/8" Steel Tube
- 100% Recycled Wheels

Design Specifications:

A. Resin Weight: 38 lbs. minimum without hardware
Overall weight approx. 42 lbs.

B. Dimensions:

1. Height: 46" Maximum with lid, fully assembled
2. Width 31" maximum at the widest point, including hardware
3. Hip on gripping surface diameter: 24" to 26"
4. Bottom: Container shall be round in the horizontal section in the area of the clasp arm, with approximately 24" diameter at the point it is picked up by the clasp arm.

MATERIAL PROPERTY AND PRODUCT SPECIFICATIONS

A. Raw material is to have the color pigment and the Ultraviolet (UV) Stabilizer compounded into the material which shall be cross-linkable polyethylene. Color cannot be dry blended into the material.

B. Plastic Resin must be cross-linkable polyethylene and shall meet the following requirements:

1. Melt Index	ASTM D 1238	N/A*
2. Density	ASTM D 1505	.935-.943 gm/cc
3. Tensile Strength	ASTM D 638	>2600 psi
4. Ultimate Elongation	ASTM D 638	>500%
5. Flexural Modulus	ASTM D 790	100,000 psi
6. Environmental Stress Crack Resistance (ESCR)	ASTM D 1693	>1,000 hrs. **
7. Low Temperature Impact	ARM Method	-40 C 40 ft-lb

*Melt index after molding due to cross-linking will be zero.

** ESCR test conditions: Concentration 10% Igepal

C. Lid:

Each container shall be furnished with a lid molded from the same material as the container. The lid shall be of such configuration that it shall not warp, bend, slump, or distort. The lid must be designed in such a manner to ensure that the container will be watertight. Lids shall open to a minimum of 270°. The lid shall be able to stay open unsupported without the use of counter weights or props while maintaining container stability.

D. Handle:

1. The handle shall be rounded and molded as part of the container. Metal, exposed PVC or square handles are unacceptable.
2. Each handle shall have a minimum grasping area of 8" long with a clearance of 2" from the handle to the container.

E. Identification:

1. A numbering system shall be incorporated that can trace each container back to the month and year of manufacturer. Such numbering system shall appear on each container.
2. All containers shall be sequentially numbered beginning with #_____. These numbers shall be molded into the container and appear on the outside.
3. All containers shall be identified with the wording "_____" inscribed and molded into the lid of the containers.
4. The following working and arrows shall be molded on the lid of each container:
 - A. "DO NOT PLACE FLAMMABLES, HOT ASHES OR COALS IN THIS CONTAINER. KEEP LID CLOSED"

B. "PLACE CONTAINER WITH ARROW FACING STREET FOR COLLECTION"

- F. Finish: Interior and exterior finish shall be consistent with the best known rotational molding practices of today.
- G. Wheels shall be a minimum of 10" x 2" and be made with 100% recycled content.
- H. Containers shall be stable and self-balancing when in the upright position, whether loaded or empty and maintain stability when returned to the ground at the end of the dumping cycle.
- I. Containers shall be designed to regularly received and dump up to 400 pounds.
- J. Containers shall be designed to be picked up and dumped by a clasping arm that applies radial force at a point approximately 1/3 of the height below the top edge. Containers shall be adequately designed to prevent sliding through lifting arm when lifted and turned upside down to be emptied. The container body shall be designed without large cavities or partitions which would retain refuse after dumping.
- K. Color shall be _____ . (Black is recommended.)

WARRANTY:

- A. When the word "Container" is used in this specification, it is defined as a complete unit including base, lid, wheels, and hardware. All containers furnished shall be fully (100%) warranted for a period of five (5) years (10 year warranty available) against defects including but not limited to: cracking, chipping, peeling, and distortion: failures at attachment points for lids, hinges, wheels or other points of attachment; weathering degradation, defective or insufficient material; poor material workmanship on the part of the manufacturer.

- B. Defective containers which are replaced under warranty provisions shall be replaced as complete containers, i.e. with lids provided. However, if only the lid should fail, then only the lid shall be replaced. The seller shall not be responsible for damage or destruction caused by fire, vandalism, abuse, neglect, misuse, or acts of God after the containers have been delivered and accepted.

- C. In addition to any warranty implied by fact or law, bidder expressly warrants all items to be new, free from defects in design, material and workmanship, and to be fit and sufficient for their intended purpose.

Print

<<< Back



1989 Case IH 485 Tractor For Sale

Brigham Implement Co

Brent Baugh / Hal Probst

Contact
 1900 W. Hwy 13
 PO Box 741
 Brigham City, Utah, 84302
 USA
 OFFICE +1 435 723-5229
 CELL +1 435-720-2300
 TOLL FREE 800-769-5601
 LANGUAGES SPOKEN English
 www.brighamimplement.com



Tractor CASE IH 485

[Contact Dealer](#)

[Send to a Friend](#)

[Show All Pics \(2\)](#)

Contact one of our salesman for our current equipment specials.

SAY YOU SAW THIS ON EQUIPMENTLOCATOR.COM!!!

AVAILABILITY AND PRICE SUBJECT TO CHANGE AND/OR PRIOR SALE. SPECIFICATIONS AND EQUIPMENT CONFIGURATION IS SUBJECT TO CHANGE. PLEASE CONSULT A SALES PROFESSIONAL TO ENSURE THAT WEBSITE INFORMATION IS CORRECT AND UP-TO-DATE.

EQUIP. LOCATION	Brigham City, Utah, USA				
STOCK #	U3071	SERIAL#	B023667	AVAILABLE	Immediately
MAKE	Case IH	CATEGORY	For Sale	EST HOURS	2150
MODEL	485,,	STATUS	On Yard	HORSEPOWER	45
YEAR	1989	CLASS	Used	PRICE	8,000.00 \$ 8,000.00
NOTES	■ orchard tractor				

Desert Peak